


FB SERIES 17,000 - 27,000 lbs.

Four Wheel Electric Forklift Trucks

- Reliable, Durable, Consistent Power and Strength
- Quiet, Efficient, Easy Operation and Maintenance in your Indoor Work Environments
- Low Cost to Operate, Environmentally Friendly Equipment
- Powered exclusively with Tried, Tested, and Proven Curtis AC Control Systems

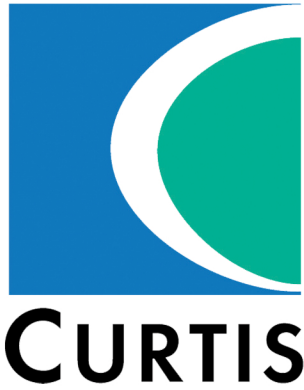

FB SERIES 80-120 ELECTRIC FORKLIFT MAST OPTIONS

TYPE	MODEL	LIFT HEIGHT (IN)	LOAD CAPACITY (LBS)			OVERALL HEIGHT (IN)			FREE LIFT (IN)		TILT ANGLE F/R (DEG)
			80	100	120	MAST LOWERED	MAST EXTENDED WITH LBR	MAST EXTENDED WITHOUT LBR	MAST EXTENDED WITH LBR	MAST EXTENDED WITHOUT LBR	
2-STAGE MAST	M250	98.4	17637	-	-	92.5	154.3	143.3	-	-	6/10
	M300	118.1	17637	22046	26455	102.4	174.0	162.9	-	-	6/10
	M330	129.9	17637	22046	26455	108.3	185.8	174.8	-	-	6/10
	M350	137.8	17637	22046	25353	112.2	193.7	182.7	-	-	6/10
	M370	145.7	17637	22046	25353	116.1	201.6	190.5	-	-	6/10
	M400	157.5	17306	22046	24251	124.0	213.4	202.4	-	-	6/10
	M450	177.2	16755	20944	23149	133.9	233.1	222.0	-	-	6/6
	M500	196.9	16314	18739	20046	143.7	252.8	241.7	-	-	6/6
	M550	216.5	15653	16535	17637	155.5	272.4	261.4	-	-	3/6
	M600	236.2	14991	15432	16314	165.4	292.1	281.1	-	-	3/6

FB SERIES 80-120 ELECTRIC FORKLIFT SPECIFICATIONS									
	MODEL				FB80	FB100	FB120		
GENERAL	1	POWER TYPE			ELECTRIC		ELECTRIC	ELECTRIC	
	2	RATED CAPACITY			LBS	17637	22046	26455	
	3	LOAD CENTER			IN	24	24	24	
CHARACTERISTICS & DIMENSIONS	4	LIFT HEIGHT			IN	118.1	118.1	118.1	
	5	FORK SIZE		L x W x T	IN	48 x 5.9 x2.7	42 x 4.9 x1.8	42 x 4.9 x1.8	
	6	MAST TILT ANGLE		F/R	DEG	6/10	6/10	6/10	
	7	FRONT OVERHANG (WHEEL CENTER TO FORK FACE)			IN	26.9	33.3	33.3	
	8	GROUND CLEARANCE (BOTTOM OF MAST)			IN	7.9	9.0	9.0	
	9		LENGTH TO FACE OF FORK (W/O FORK)		IN	148.8	173.8	173.8	
	10		OVERALL WIDTH		IN	86.6	88.6	88.6	
	11	OVERALL DIMENSION	MAST LOWERED HEIGHT		IN	102.4	111.4	111.4	
	12			MAST EXTENDED HEIGHT (W/ LBR)	IN	173.2	167.7	167.7	
	13			OVERALL GUARD HEIGHT	IN	98.4	103.9	103.9	
	14	TURNING RADIUS (OUTSIDE)			IN	131.9	151.6	151.6	
	15	MIN. INSECTING AISLE			IN	139.8	159.4	159.4	
	PERFORMANCE	16	SPEED	TRAVEL (EMPTY LOAD)		MPH	8.6	8.6	8.6
		17		LIFTING (FULL LOAD)		IN/S	11.8	11.0	11.0
		18	MAX GRADEABILITY			%	10	10	10
CHASSIS	19	TIRE	FRONT		9.0 x 16 - 14 PR		9.0 x 20 - 14 PR	9.00-20 PR	
	20		REAR			8.25 x 15 - 14 PR	8.25 x 20- 14 PR	8.25-20 PR	
	21	WHEELBASE			IN	96.5	112.2	112.2	
	22	SERVICE WEIGHT			LBS	28175	32628	34833	
POWER & TRANSMISSION	23	BATTERY	VOLTAGE/CAPACITY		V/Ah	80/1150	96/1250	96/1250	
	24	MOTOR	DRIVE MOTOR		HP	15	15	15	
	25		LIFT MOTOR		HP	12	12	12	
	26	CONTROLLER	MANUFACTURER			CURTIS	CURTIS	CURTIS	
	27		TYPE			AC	AC	AC	
	28	OPERATING PRESSURE FOR ATTACHMENT			MPA	18	18	18	

