


## FB-20 ELECTRIC FORKLIFT










## 4-WHEEL ELECTRIC FORKLIFT 2.0-2.5 TON

	1		Model		FB20		
General	2		Power Type		Electric		
	3	Rated Capacity		lbs	4409.2		
	4	Load Centre		in	19.7		
Characreristic&Dimension	5	Lift Height		in	118.1		
	6	Fork Size	L×W×T	in	42.1x4.7x1.6		
	7	Mast Tilt Angle	F/R	Deg	6°/12°		
	8	Front Overhang (Wheel center to fork face)		in	16.6		
	9	Tread	F/R	in	35.1/36.3		
	10	Ground Clearance (Bottom of mast)		in	4.6		
	11	Fork Spread	Min. / Max.	in	9.5/38.2		
	12		Length to face of fork(Without fork)	in	84.7		
	13	Overall Dimension	Overall Width	in	43		
	14		Mast Lowered Height	in	78.6		
	15		Mast Extended Height(With backrest)	in	155.4		
	16		Overhead Guard Height	in	85.5		
	17	Turning Radius (outside)		in	76.8		
	18	Min. insecting aisle		in	80.8		
nce	19	Speed	Travel (Empty load)	mph	9.3		
orna	20		Lifting(Full load)	in/s	11.8		
Perfornance	21	Max.Gradeability		%	15		
Chassis	22	Tire	Front		7.00-12-12 PR		
	23		Rear		18x7-8-14 PR		
	24	Wheelbase		in	59.4		
	25	Service weight		lbs	9193.3		
Power&Transimission	26	Motor	Drive Motor	kw	11		
	27		Lift Motor	kw	8.6		
	28	Battery	Voltage/Capacity	V/Ah	48/400		
	29	Controller	Manufacturer		CURTIS		
	30		Туре		AC		
	31	Operating Pressure for Attachment		psi	2538.2		

## FB-25 ELECTRIC FORKLIFT



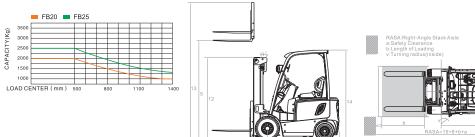

## **4-WHEEL ELECTRIC FORKLIFT 2.0-2.5 TON**

General	1		Model		FB25
	2	Power Type			Electric
	3	Rated Capacity		lbs	4409.2
	4	Load Centre		in	19.7
	5	Lift Height		in	118.1
	6	Fork Size	L×W×T	in	42.1x4.7x1.6
	7	Mast Tilt Angle	F/R	Deg	6°/12°
<u>_</u>	8	Front Overhang (Wheel center to fork face)		in	16.6
imensi	9	Tread	F/R	in	35.1/36.3
	10	Ground Clearance (Bottom of mast)		in	4.6
785 1	11	Fork Spread	Min. / Max.	in	9.5/38.2
Characreristic&Dimension	12	Overall Dimension	Length to face of fork(Without fork)	in	84.7
	13		Overall Width	in	43
	14		Mast Lowered Height	in	78.6
	15		Mast Extended Height(With backrest)	in	155.4
	16		Overhead Guard Height	in	85.5
	17	Turning Radius (outside)		in	76.8
	18	Min. insecting aisle		in	80.8
Perfornance	19	Speed	Travel (Empty load)	mph	9.3
orna	20		Lifting(Full load)	in/s	10.6
Perf	21	Max.Gradeability		%	15
	22	Tire	Front		7.00-12-12 PR
SSiS	23		Rear		18x7-8-14 PR
Chassis	24	Wheelbase <sup>r</sup>		in	59.4
	25	Service weight		lbs	9193.3
Power&Transimission	26	Motor	Drive Motor	kw	11
	27		Lift Motor	kw	8.6
	28	Battery	Voltage/Capacity	V/Ah	48/630
ΣΤς	29	Controller	Manufacturer		CURTIS
ver8	30		Туре		AC
Pov	31	Operating Pressure for Attachment		psi	2538.2