




# FB-25

## ELECTRIC FORKLIFT

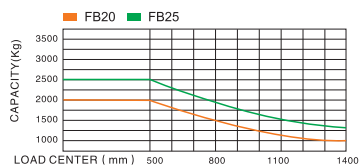

### 4-WHEEL ELECTRIC FORKLIFT 2.0-2.5 TON

General	1	Model		FB25
	2	Power Type		Electric
	3	Rated Capacity	lbs	4409.2
	4	Load Centre	in	19.7
Characteristic&Dimension	5	Lift Height		in 118.1
	6	Fork Size	L×W×T	in 42.1x4.7x1.6
	7	Mast Tilt Angle	F/R	Deg 6°/12°
	8	Front Overhang (Wheel center to fork face)		in 16.6
	9	Tread	F/R	in 35.1/36.3
	10	Ground Clearance (Bottom of mast)		in 4.6
	11	Fork Spread	Min. / Max.	in 9.5/38.2
	12	Overall Dimension	Length to face of fork(Without fork)	in 84.7
	13		Overall Width	in 43
	14		Mast Lowered Height	in 78.6
	15		Mast Extended Height(With backrest)	in 155.4
	16	Overhead Guard Height		in 85.5
	17	Turning Radius (outside)		in 76.8
	18	Min. insecting aisle		in 80.8
Performance	19	Speed	Travel (Empty load)	mph 9.3
	20		Lifting(Full load)	in/s 10.6
	21	Max.Gradeability		% 15
Chassis	22	Tire	Front	7.00-12-12 PR
	23		Rear	18x7-8-14 PR
	24	Wheelbase		in 59.4
	25	Service weight		lbs 9193.3
Power&Transmission	26	Motor	Drive Motor	kw 11
	27		Lift Motor	kw 8.6
	28	Battery	Voltage/Capacity	V/Ah 48/630
	29	Controller	Manufacturer	CURTIS
	30		Type	AC
	31	Operating Pressure for Attachment		psi 2538.2